
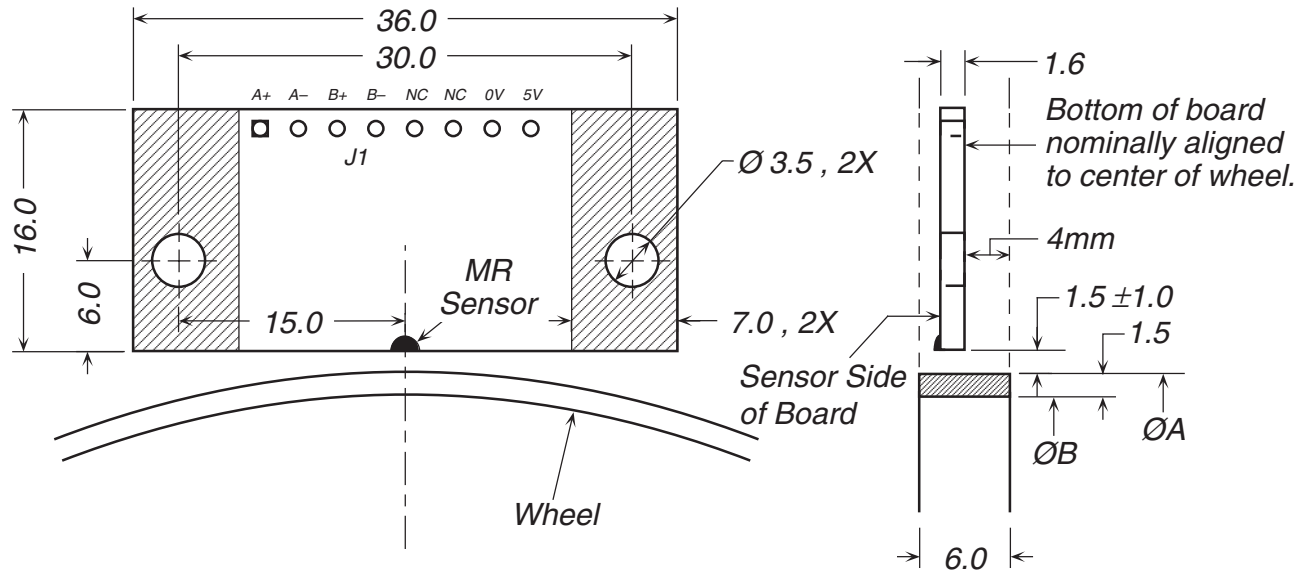



### Wheel Reference Specifications

Tensile Strength	<b>480</b>	kg/cm <sup>2</sup> (ASTM D-638)
Flexural Strength	<b>840</b>	kg/cm <sup>2</sup> (ASTM D-790)
Rockwell Hardness	<b>R110</b>	ASTM D-785



 Sensor mounting area.  
Free of components  
and traces (both sides).

REFERENCE		MATERIAL	As shown.		 <small>ADMOTEC INC., LEBANON NEW HAMPSHIRE USA</small>	
<b>REVISIONS</b> DIMENSIONS IN MILLIMETERS TOLERANCES UNLESS OTHERWISE SPECIFIED  .X: ± 0.10 .XX: ± 0.05 ANGLES: ± 0°30'		HEAT TREAT	Not applicable.			
		FINISH	Not applicable.		<b>KXL2200 Type I Encoder Outline &amp; Mounting</b>	
		DRAWN	D Robinson	DATE		
		CHECKED		DATE		DRAWING SIZE <b>A</b>
		APPROVED		DATE		
THIS DRAWING IS THE PROPERTY OF ADMOTEC INC. IT MAY NOT BE COPIED, USED OR DIS- CLOSED FOR ANY PURPOSE WITHOUT WRITTEN PERMISSION BY ADMOTEC INC.				7310-321 SCALE 2:1		REVISION —
				SHEET 1 OF 1		